
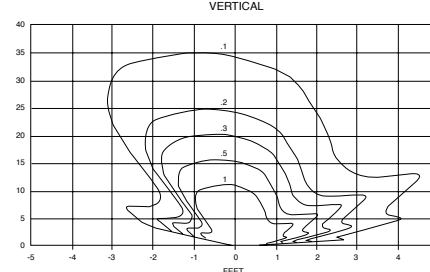
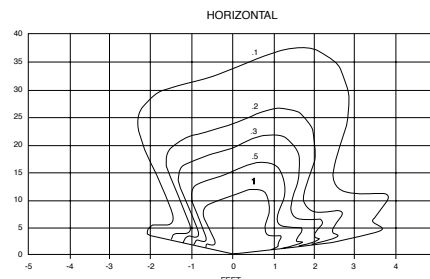




The EL4 Series is an architectural grade four-head emergency light primarily suited for ceiling mounted applications. This product features innovative architectural styling and technologically advanced features.

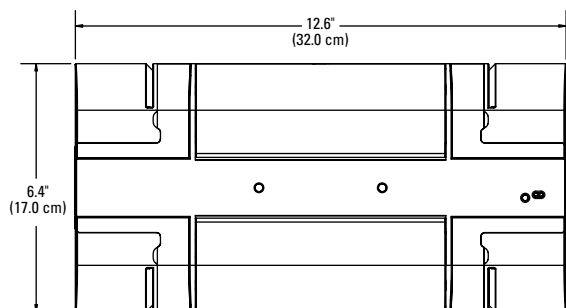

Complete fixture consists of unit and two lamp heads. Lamp Head Photometrics (per lamp)

How to Specify:

EL4

Model Series

EL4

Enclosure Color

Enclosure Color

W = White
B = Black

Battery

Battery

N = NiMH

Options

Options

I = Infrared Remote Sensor¹
TD = Time Delay

Features

- 1. Illumination:** Four rotatable reflector assemblies with adjustable beam patterns. Unit includes 6 VDC, 6 watt halogen lamps housed in impact resistant lamp covers.*
- 2. Housing:** Impact resistant, injection molded UL 94-5VA flame retardant thermoplastic housing. UV-stabilized to resist discoloration. White finish is standard, black is optional.
- 3. Mounting:** Unit is either ceiling or wall mountable.
- 4. Standard Self-Testing/Self-Diagnostics:** Unit runs an internal test every five seconds for secondary voltage, charge current, battery voltage, and LED illumination. Performs automatic 1 minute discharge test every 30 days and 30 minute discharge test every 180 days meeting and exceeding UL 924 and NFPA 101 requirements. The Infrared Option allows a remote control to initiate a 5 second and 30 minute self-test in addition to the standard 1 minute and 90 minute manual test capability.
- 5. Electronics:** 120/277 VAC dual voltage input. Microprocessor controlled charge, transfer and monitoring system. Charging system is complete with low voltage disconnect, AC lockout, and brownout protection. Includes an AC indicator/systems status lamp and manual test switch.
- 6. Battery:** Maintenance free, sealed nickel metal hydride battery with 10 year life and an operating temperature between 14°F (-10°C) and 113°F (45°C). NiMH battery is a non-toxic, environmentally friendly product which is recyclable.
- 7. Input Power Requirements:**
120 VAC - .109 amps, 12.6W
277 VAC - .048 amps, 13.10W

Warranty

Electronics: 3 years, **Battery:** 5 years full, 5 years pro-rata

Code Compliance

UL 924 listed, NFPA 101.

Options

I = Infrared Remote Sensor¹

TD = Time Delay

Note:

¹ For use with remote control which is ordered separately. Item number: IRemote

Accessories

IREMOTE - Infrared Remote Control

*Replacement Lamping: No. 784, T2.25, G-4 Two Pin Base, 6 Volt, 6 Watt Miniature Lamp.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes: